



Ventily a armatury jsou určeny do laboratorního prostředí; jsou vyrobeny z mosazi s chemicky odolnou povrchovou úpravou (epoxypolyester). Těla ventilů a armatur jsou vyrobeny z materiálů, které odpovídají normám EN 12168, EN 12164, EN 12165. Napojovací olivky jsou v souladu s normou DIN 12918, závity s ISO 228/1, tolerance třída B. Pevné olivky jsou vyrobeny v souladu s normou DIN 12898.

Ovládací kohouty (rukojeti) jsou vyrobeny z chemicky odolného polypropylenu. Jejich barevné provedení a značení je podle EN 13792:2000 Barevné značení kohoutů a ventilů pro užití v laboratořích.

STANDARDY ventilů a armatur

Nástěnné:

standard G3/8", délka 30 mm. Varianta G1/2" a délka 30 mm


Stojánkové:

standard G3/8", délka 80 mm. Varianta G1/2" a délka 80 mm



AO řada VODA

Ventily pro vodu jsou testovány na maximální pracovní tlak 7 bar. Těsnění hlavice EPDM nebo keramické, teplotní rozsah 0 - 70°C.


PRO LAB SYS

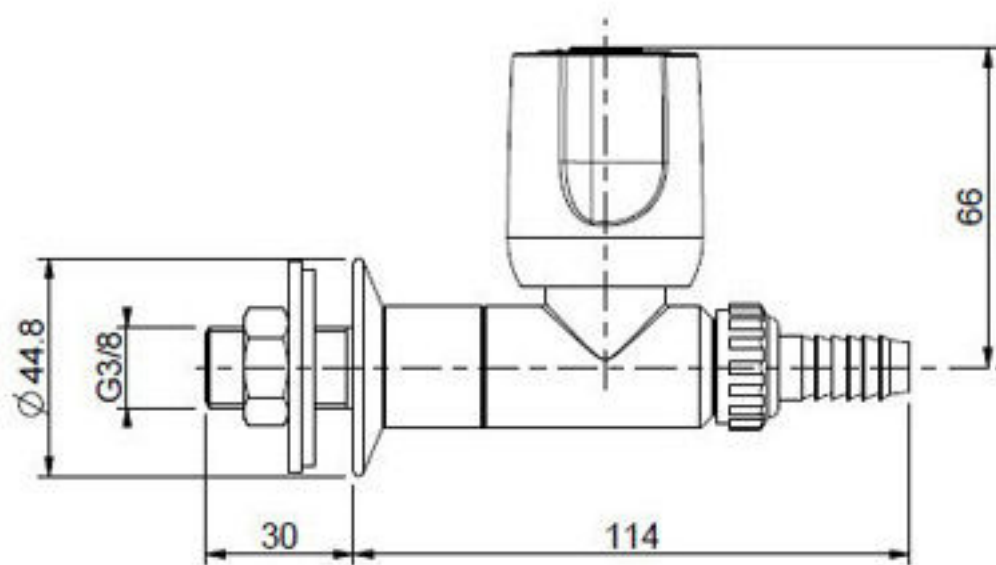


PRO LAB SYS

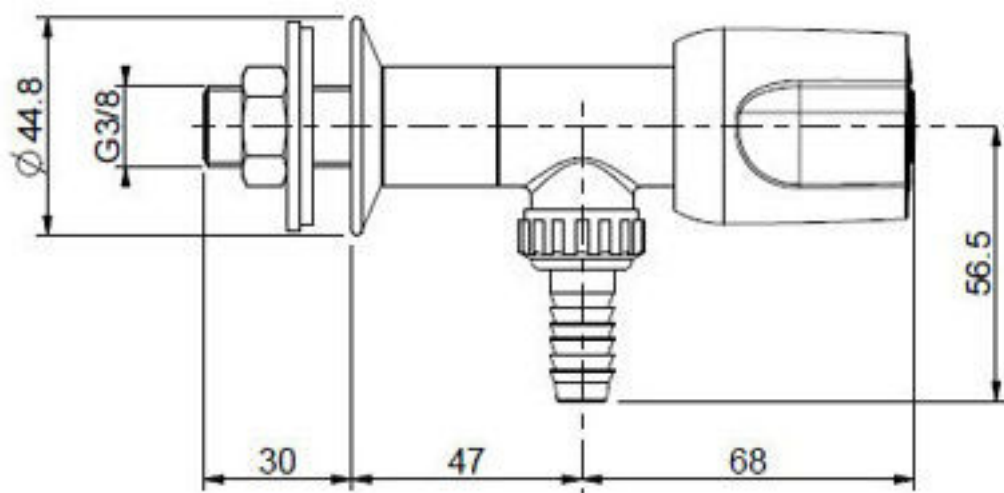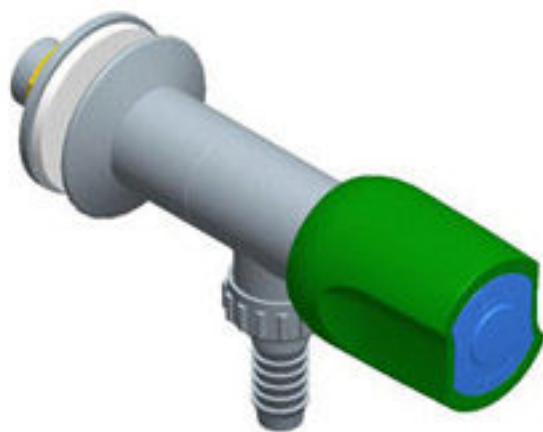


PRO LAB SYS

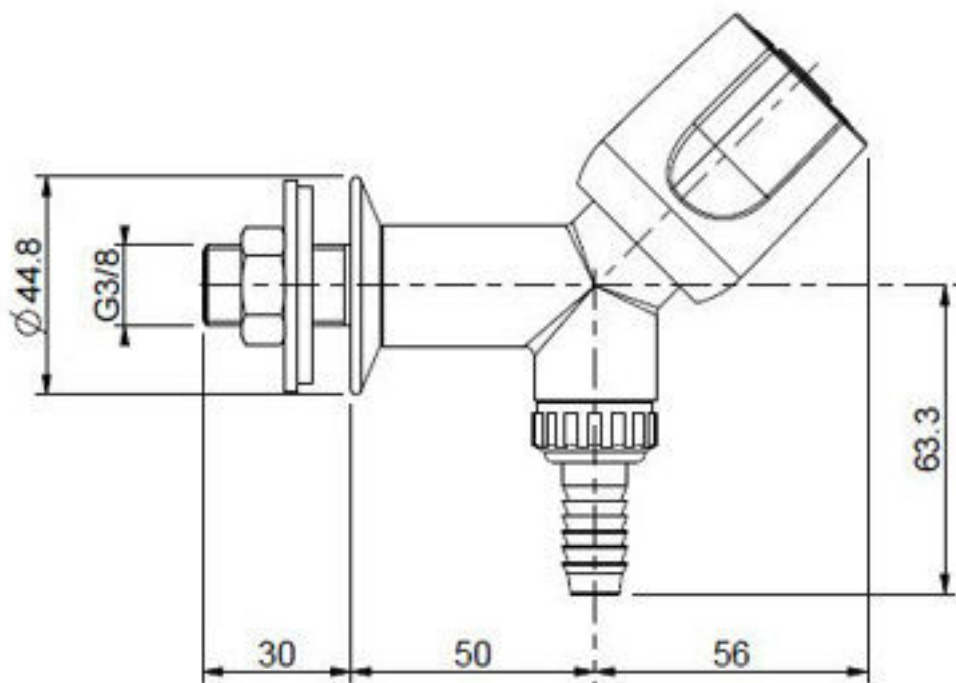



PRO LAB SYS

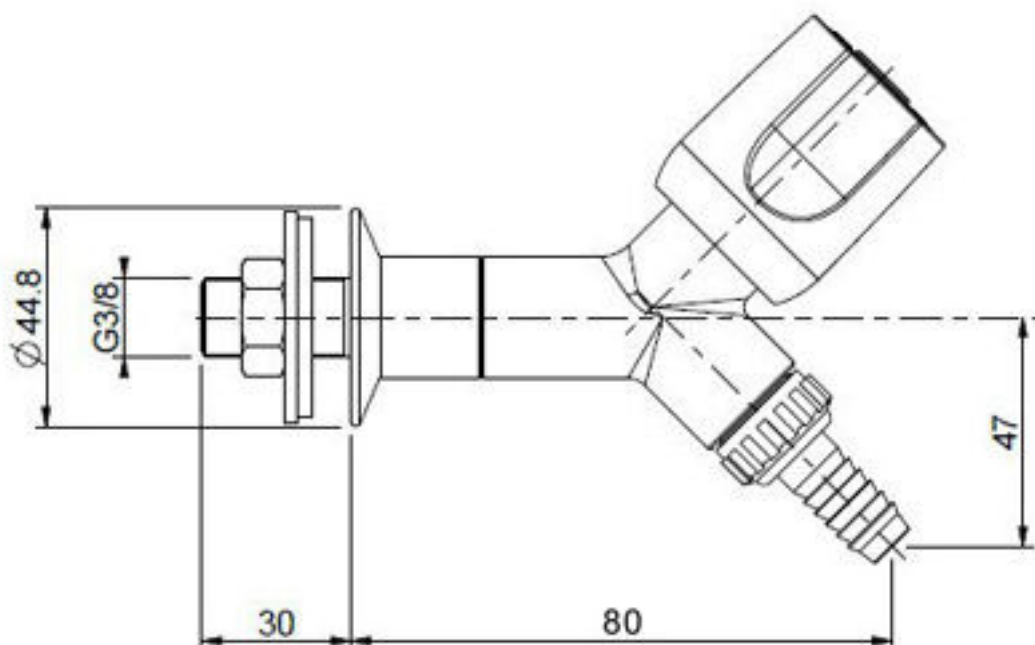


PRO LAB SYS

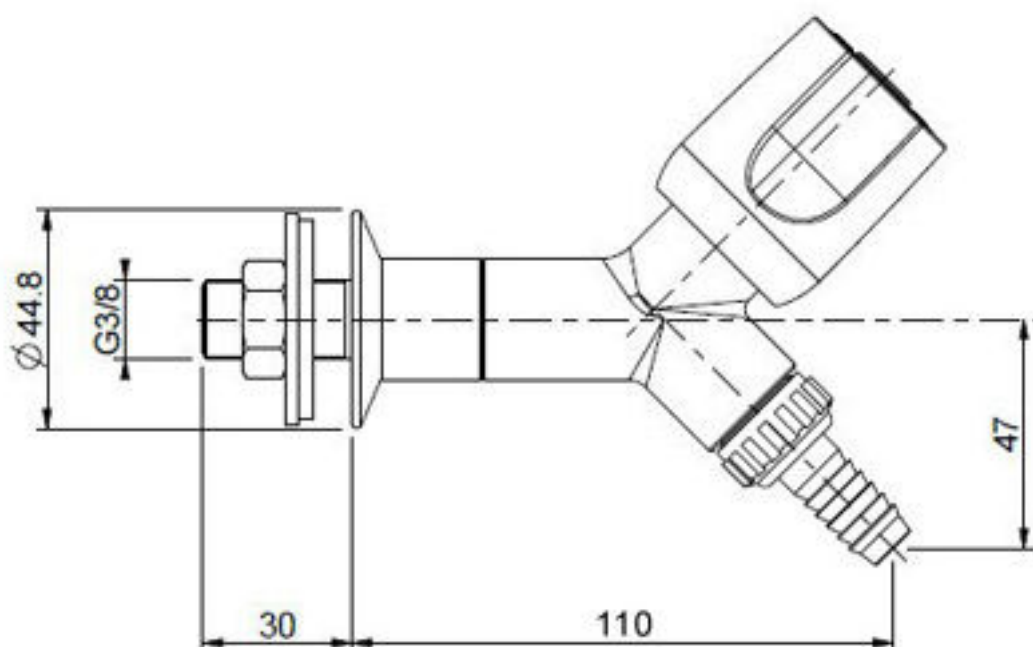


PRO LAB SYS

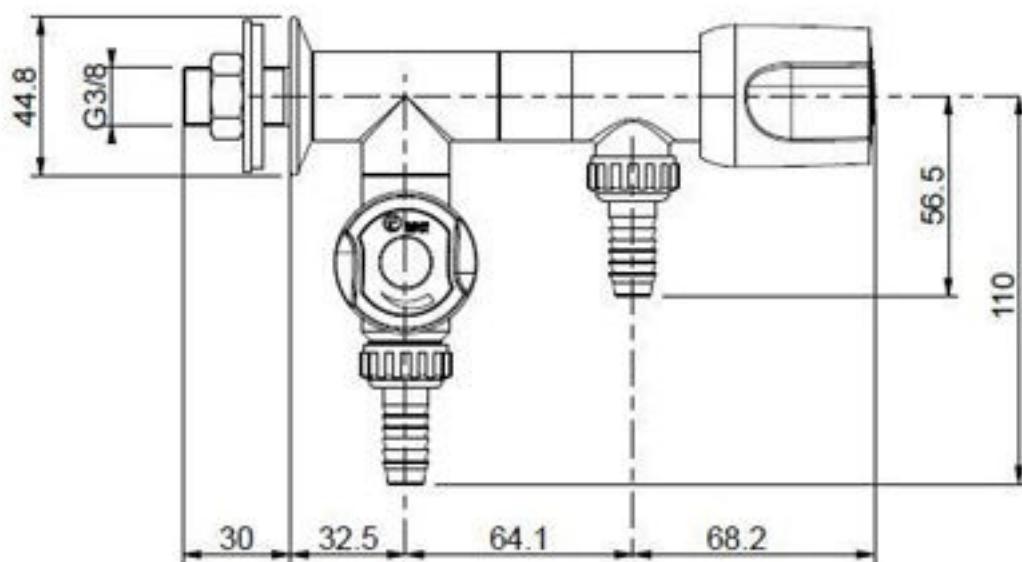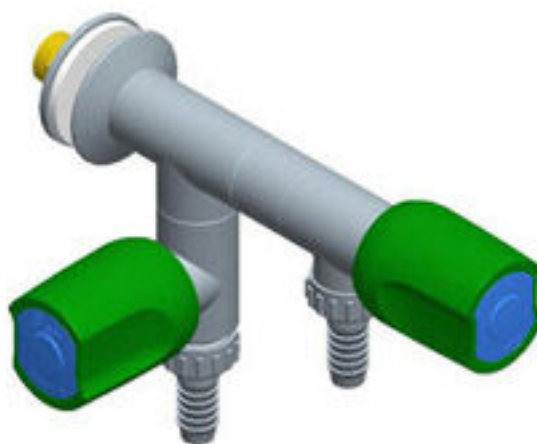




PRO LAB SYS

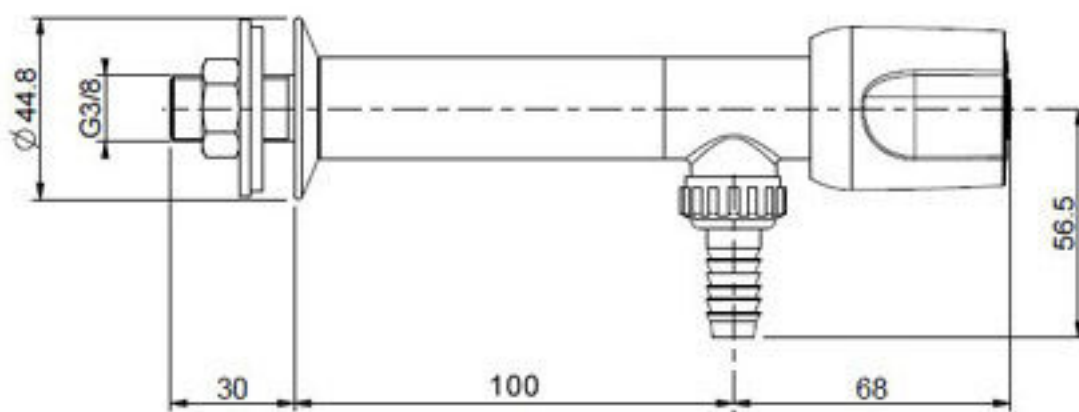




PRO LAB SYS

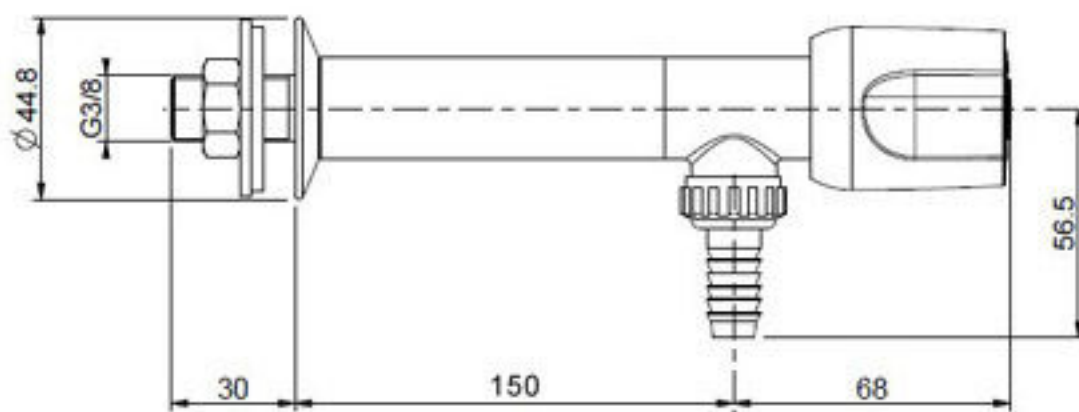




PRO LAB SYS

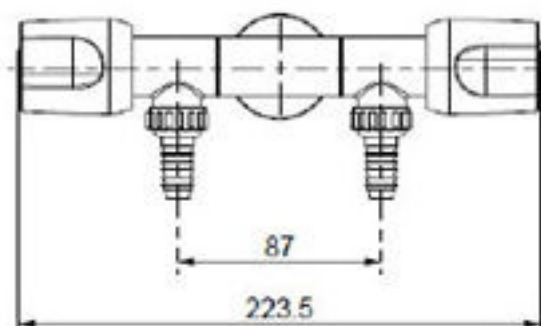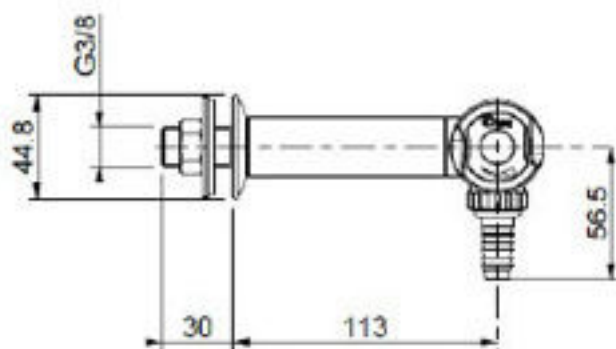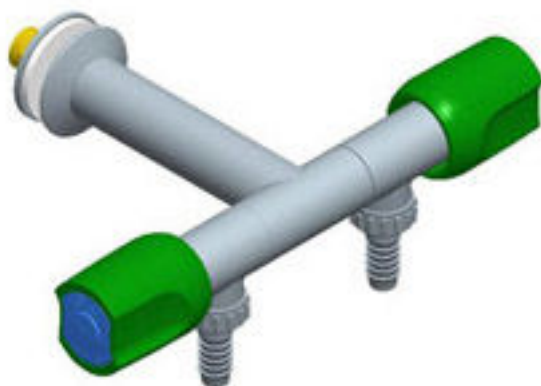




PRO LAB SYS

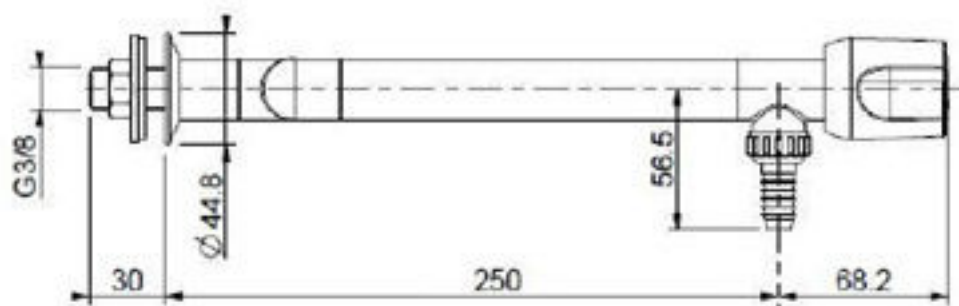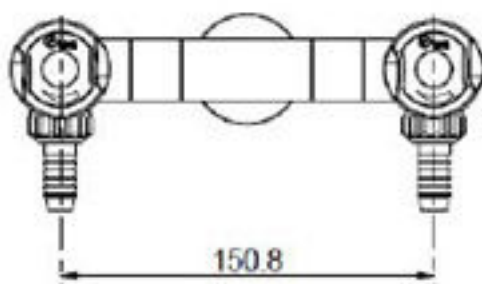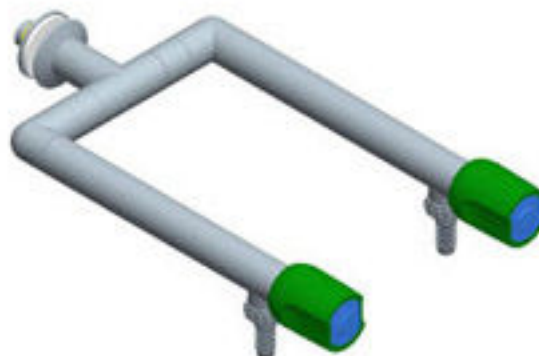



PRO LAB SYS

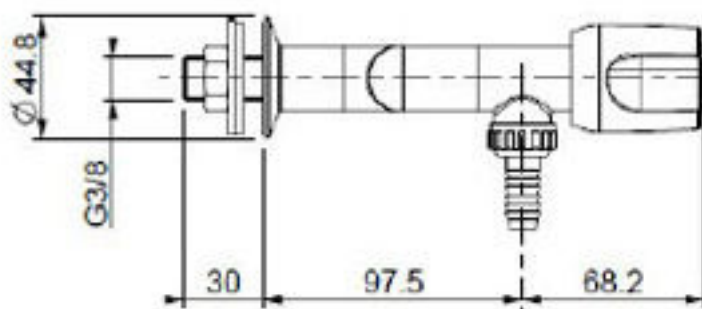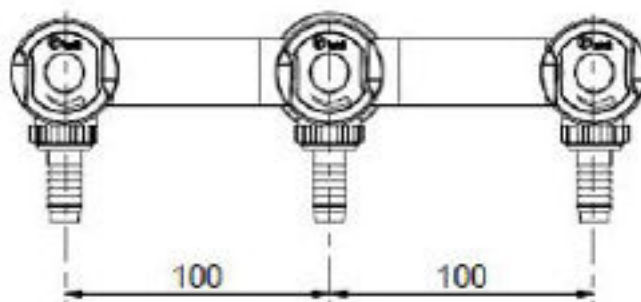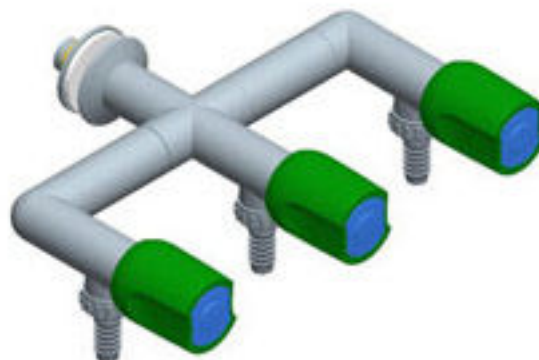


PRO LAB SYS

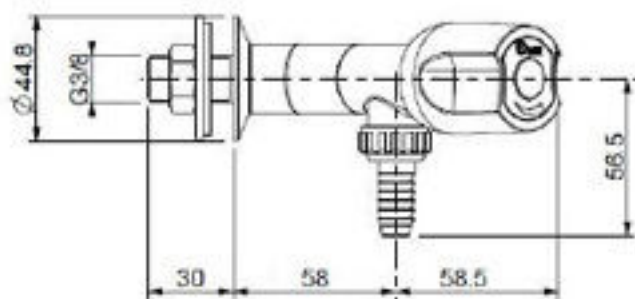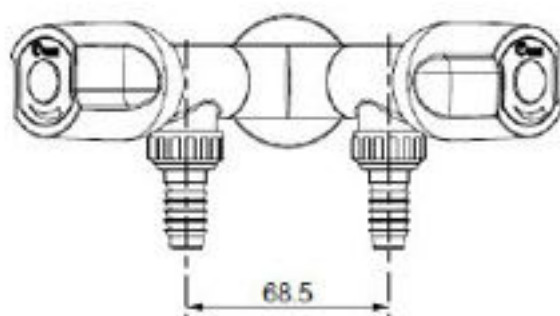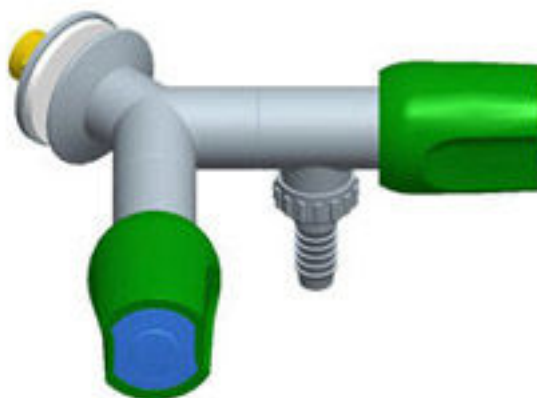


PRO LAB SYS

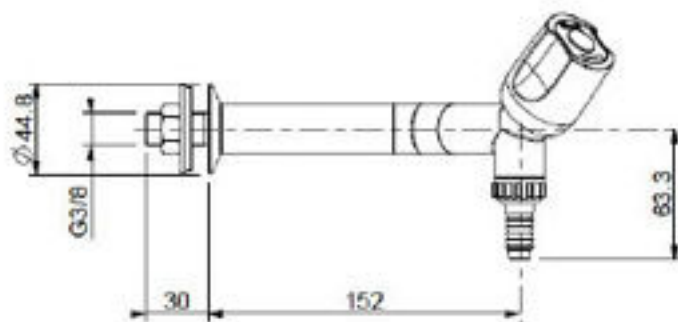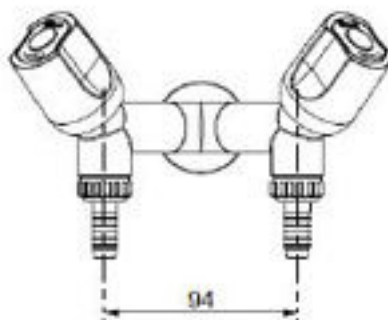



PRO LAB SYS

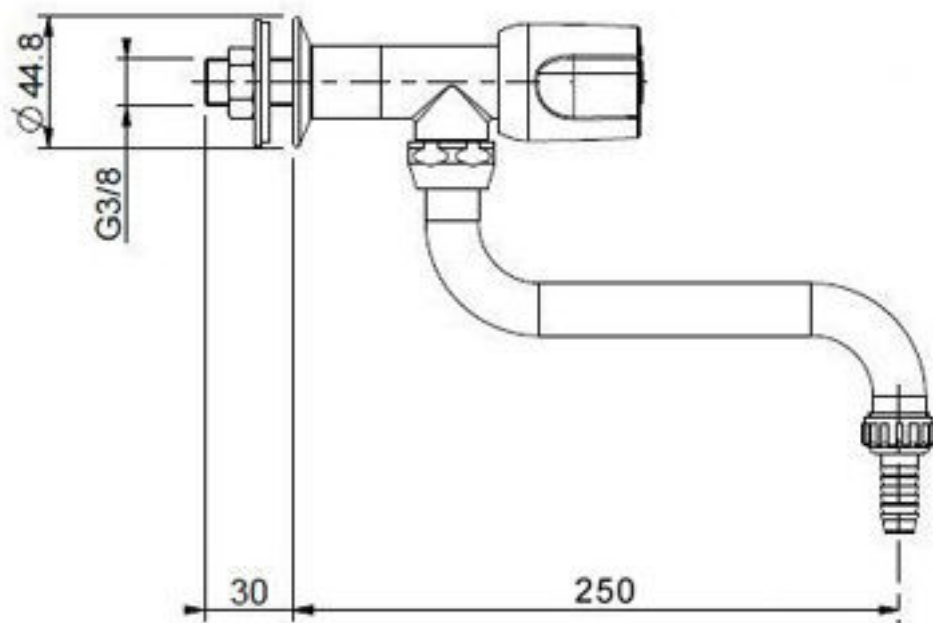



PRO LAB SYS

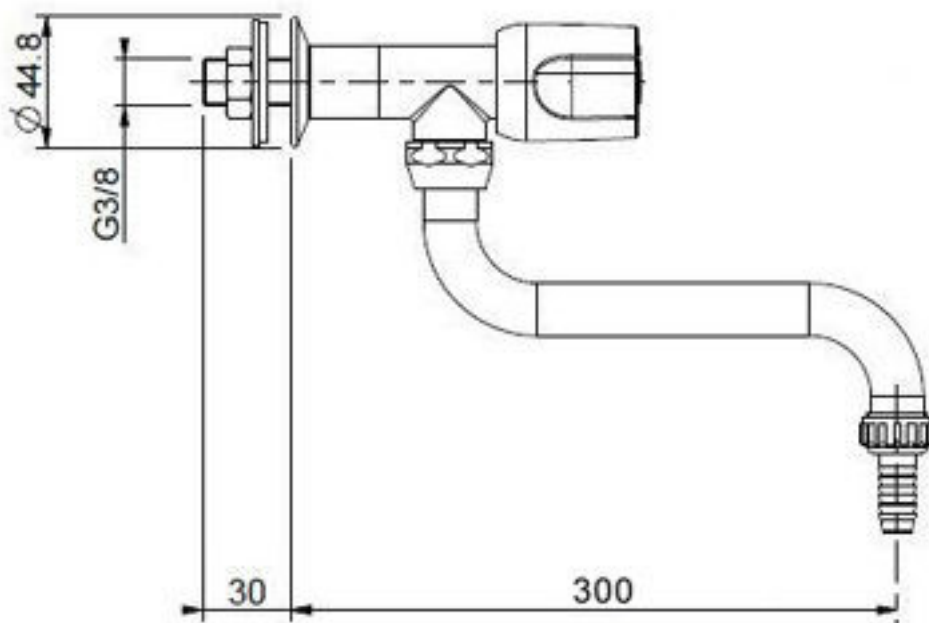


PRO LAB SYS

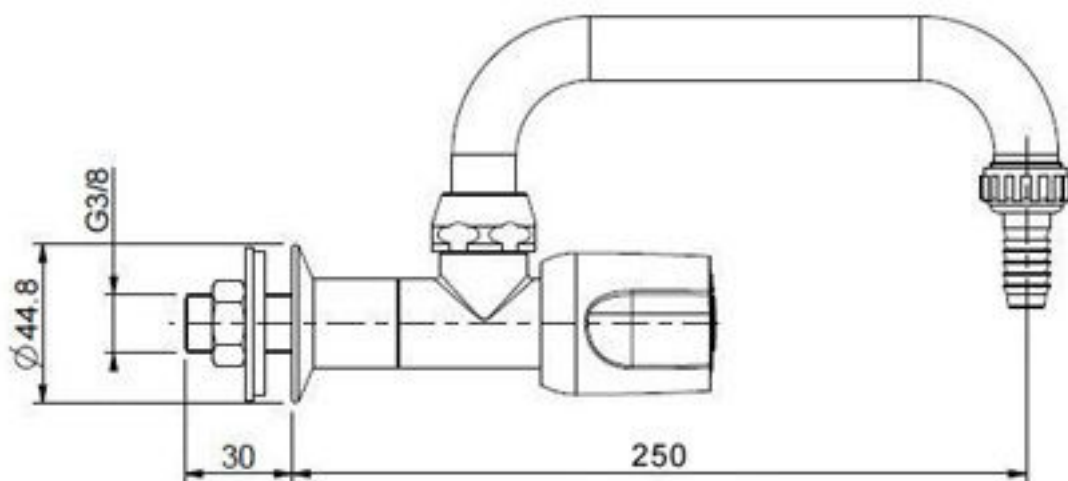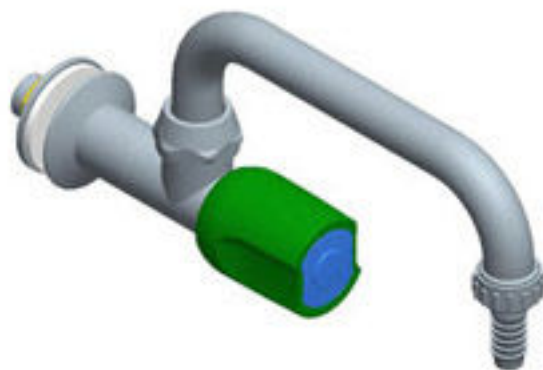


PRO LAB SYS

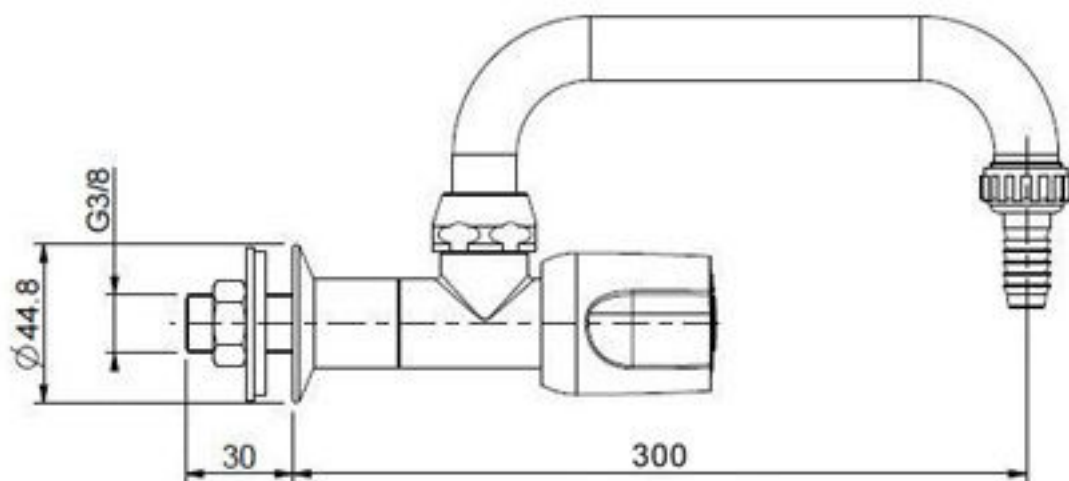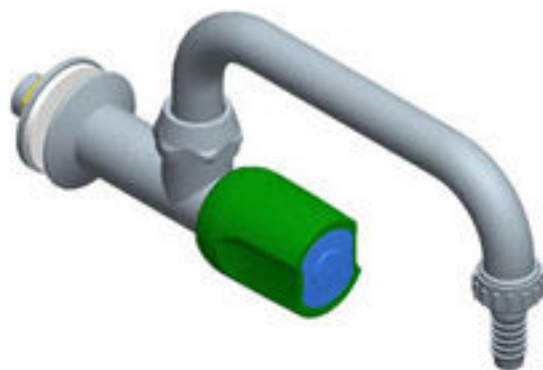


PRO LAB SYS

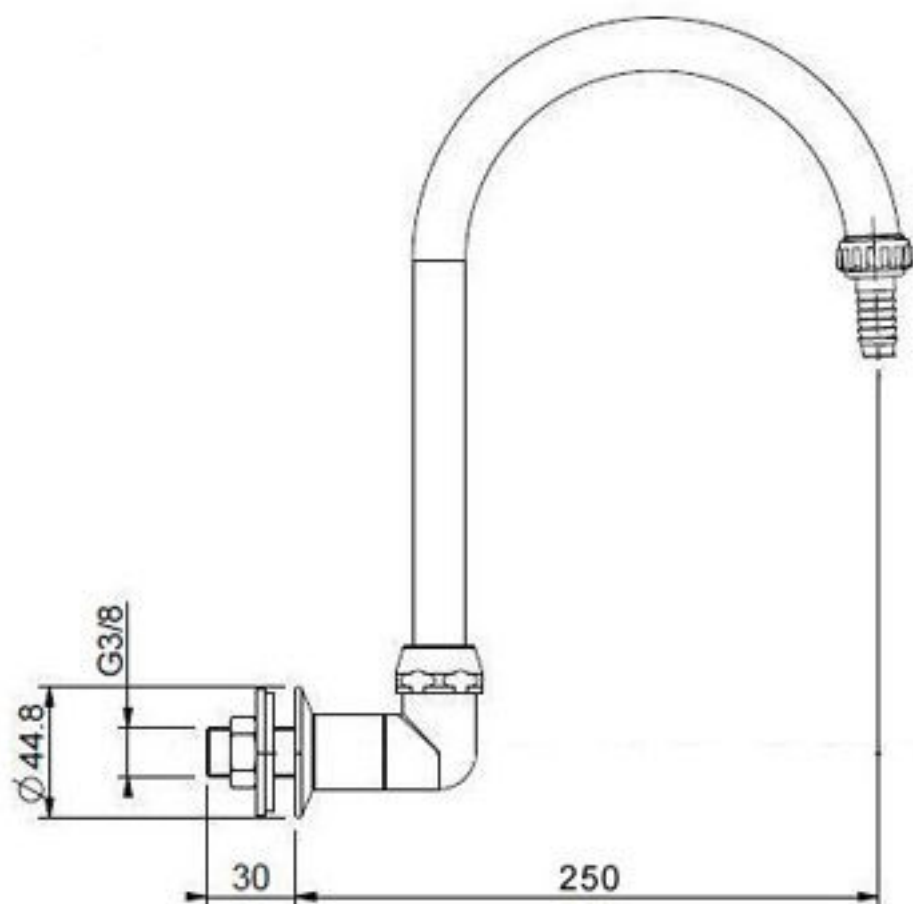


PRO LAB SYS

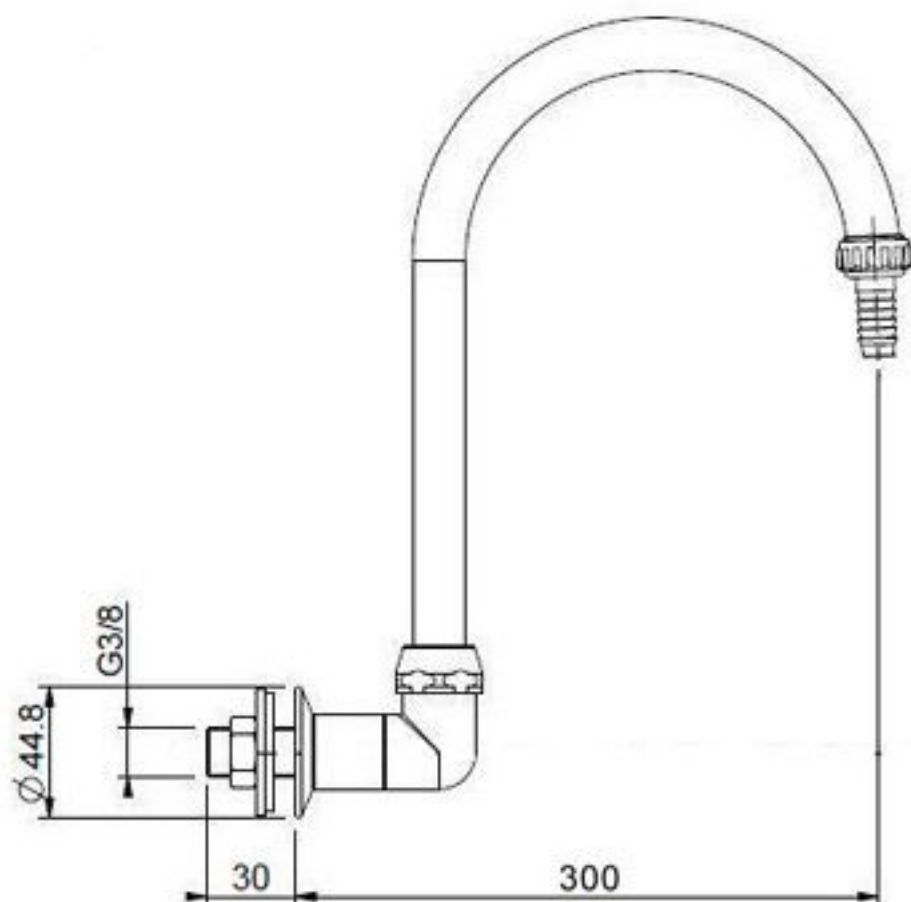


PRO LAB SYS

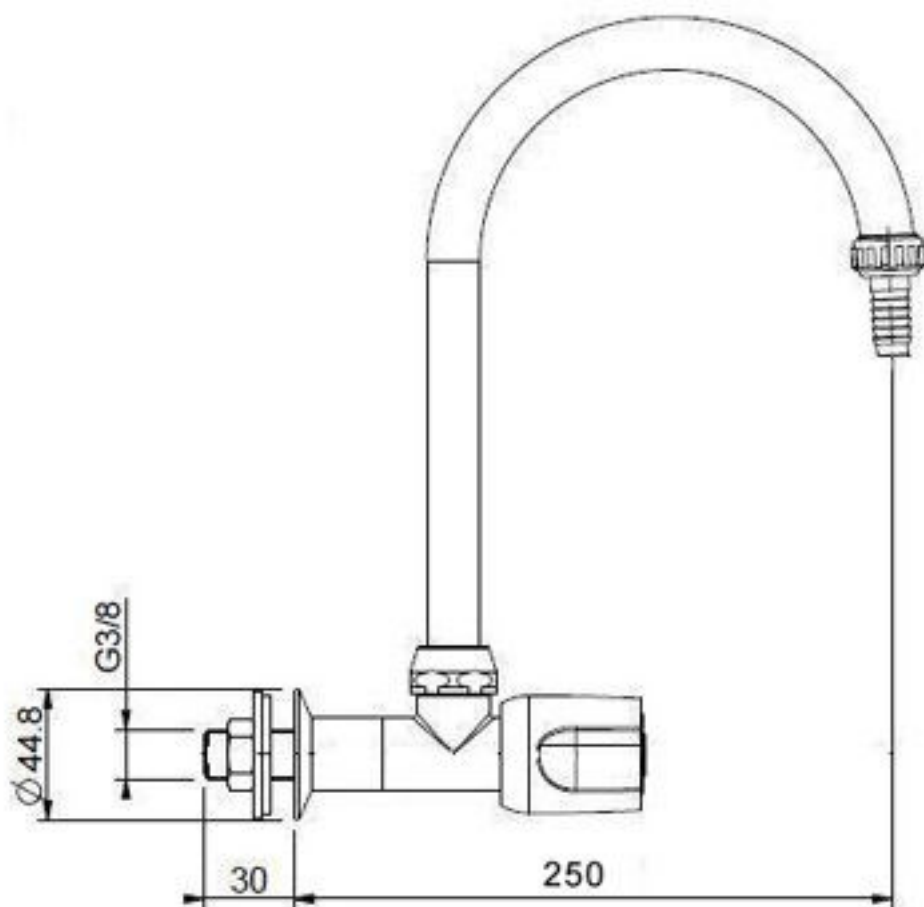


PRO LAB SYS

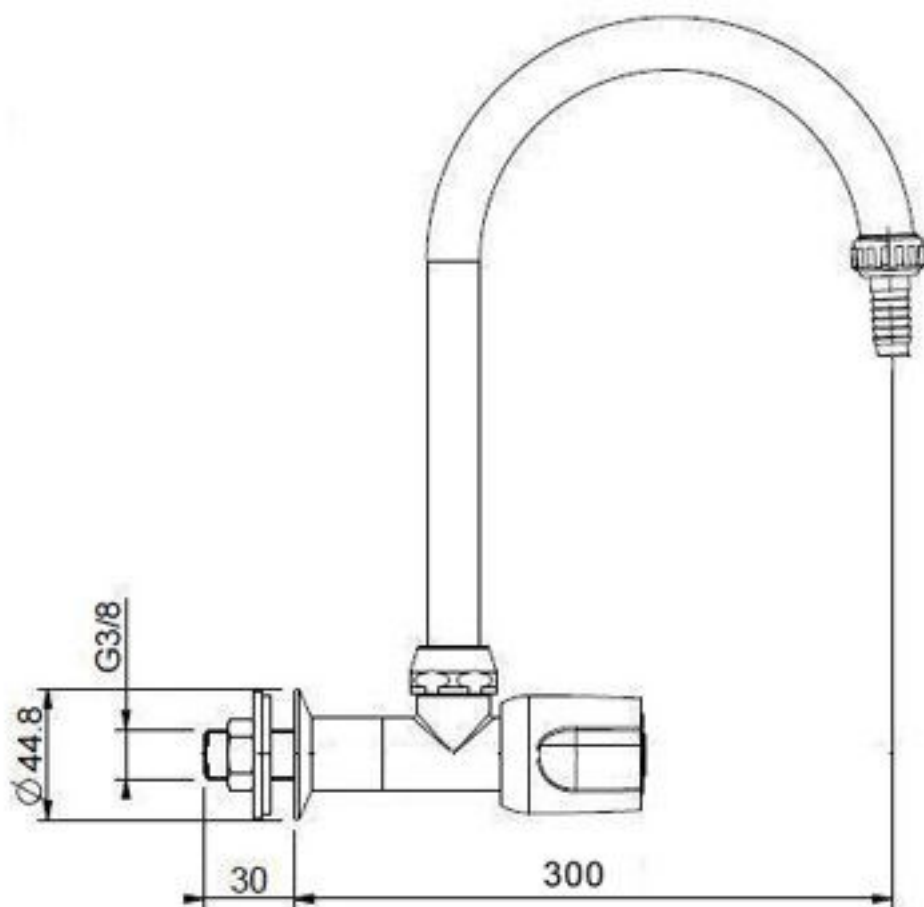


PRO LAB SYS

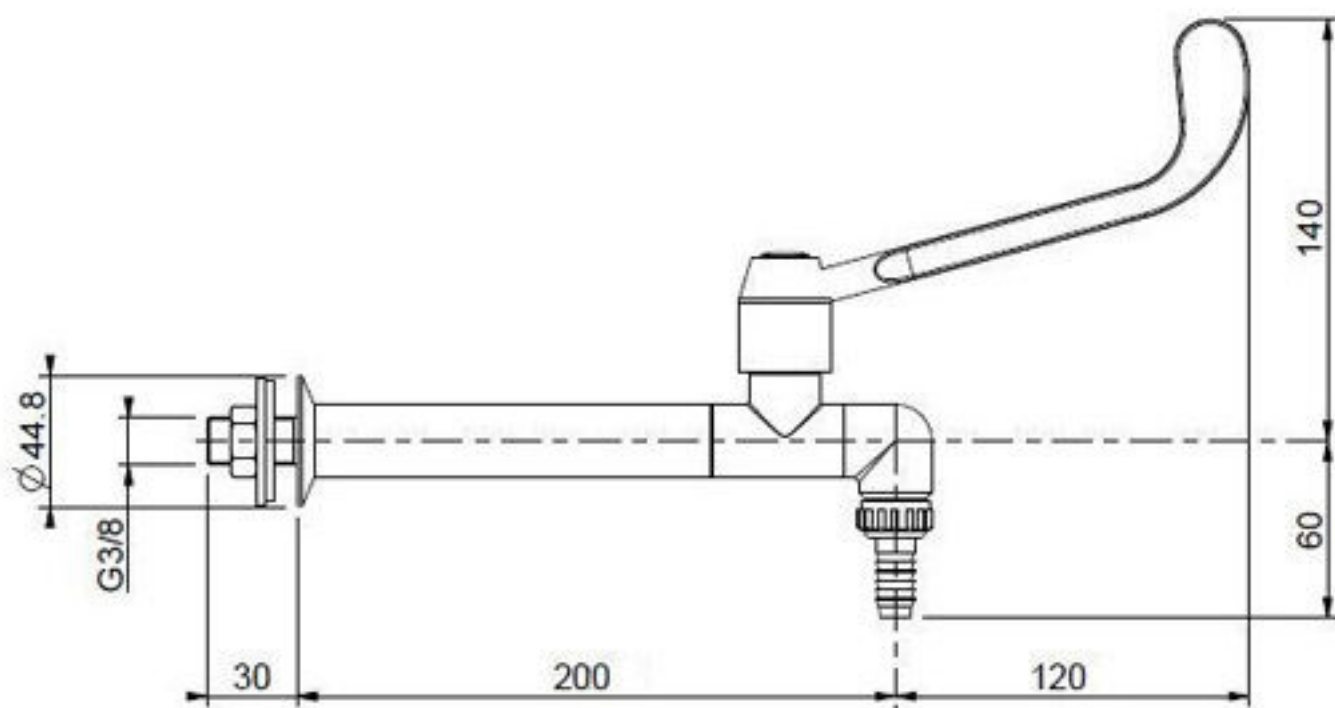




PRO LAB SYS

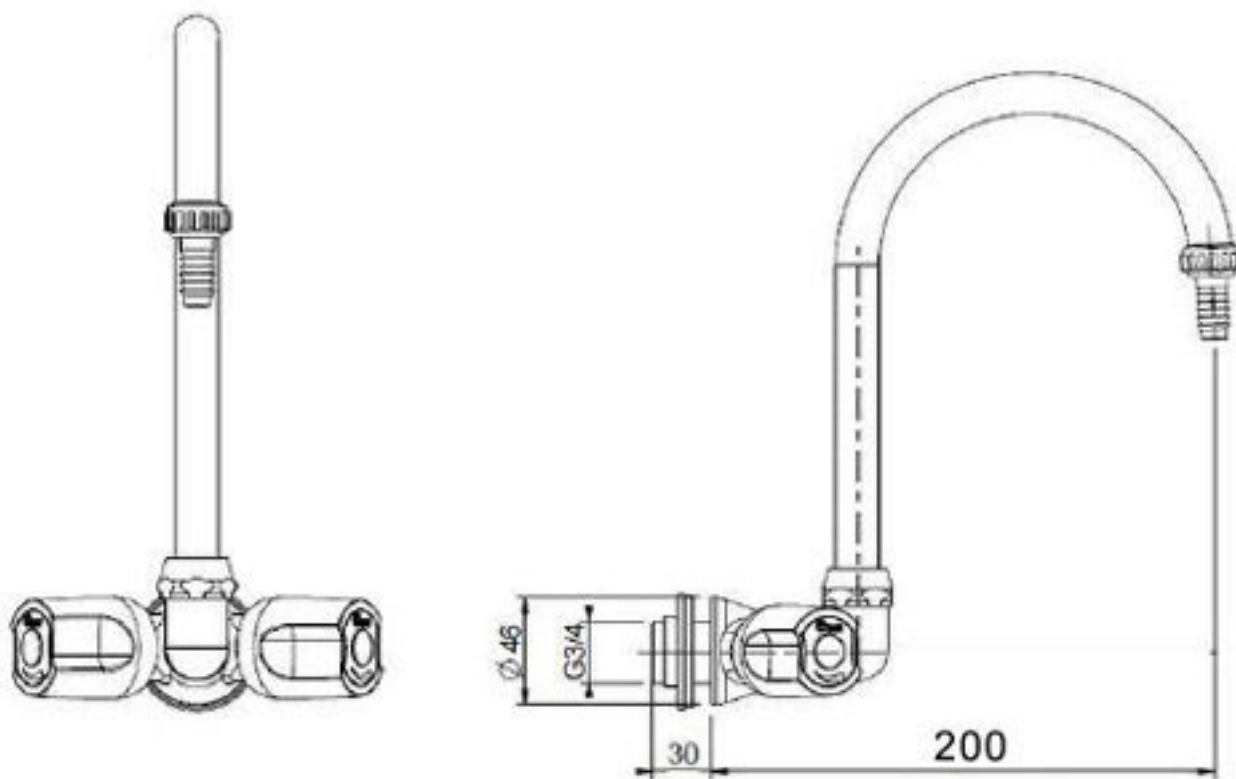




PRO LAB SYS

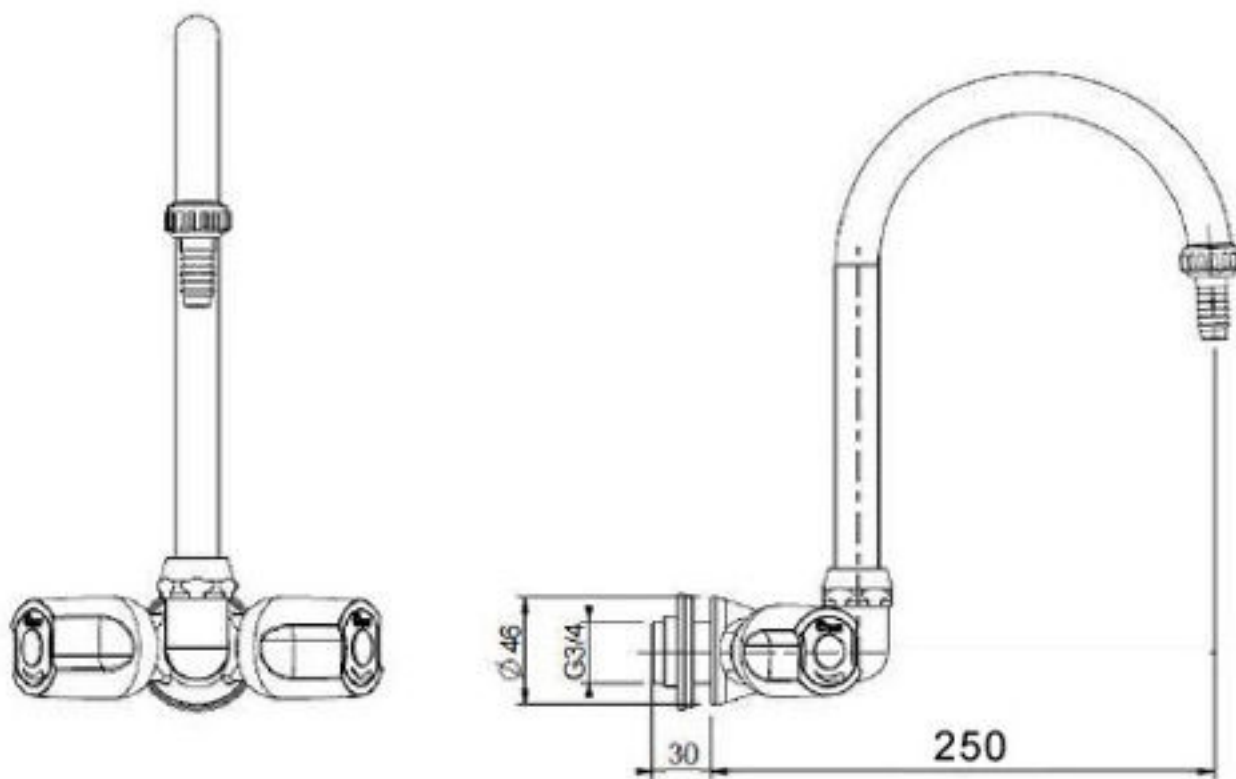


PRO LAB SYS

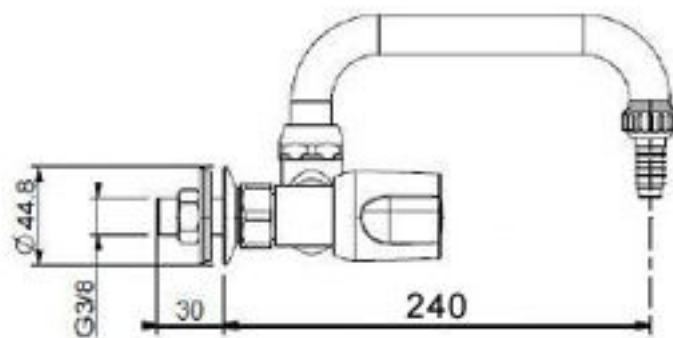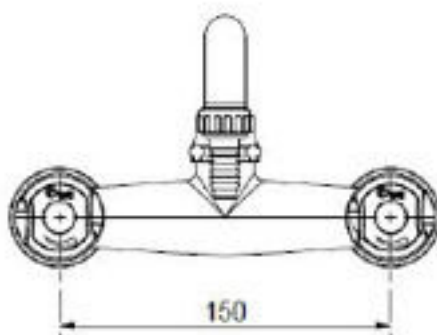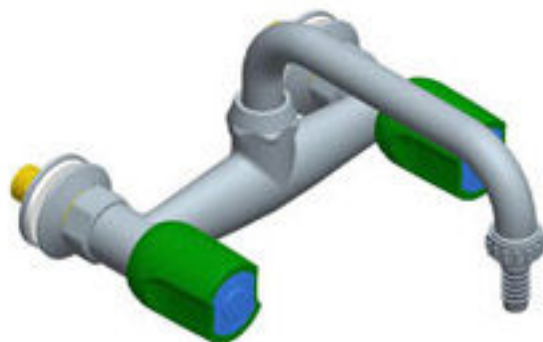


PRO LAB SYS

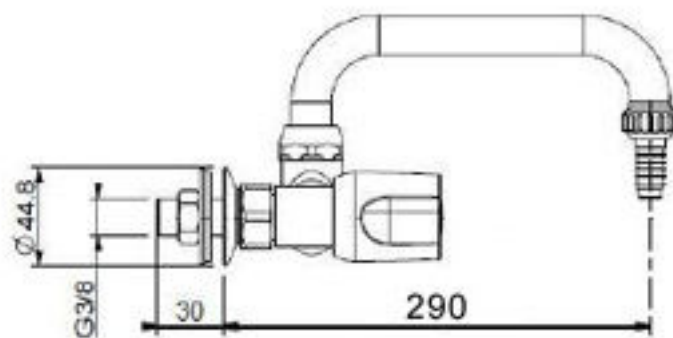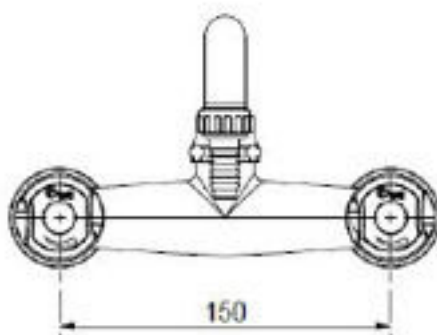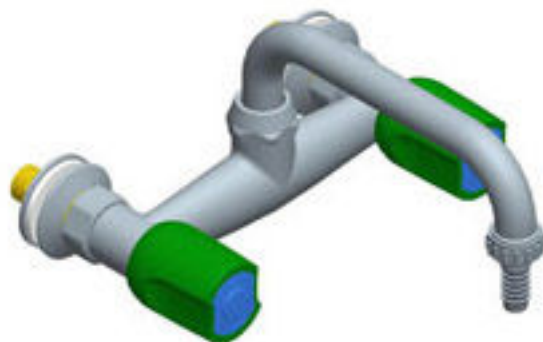




PRO LAB SYS

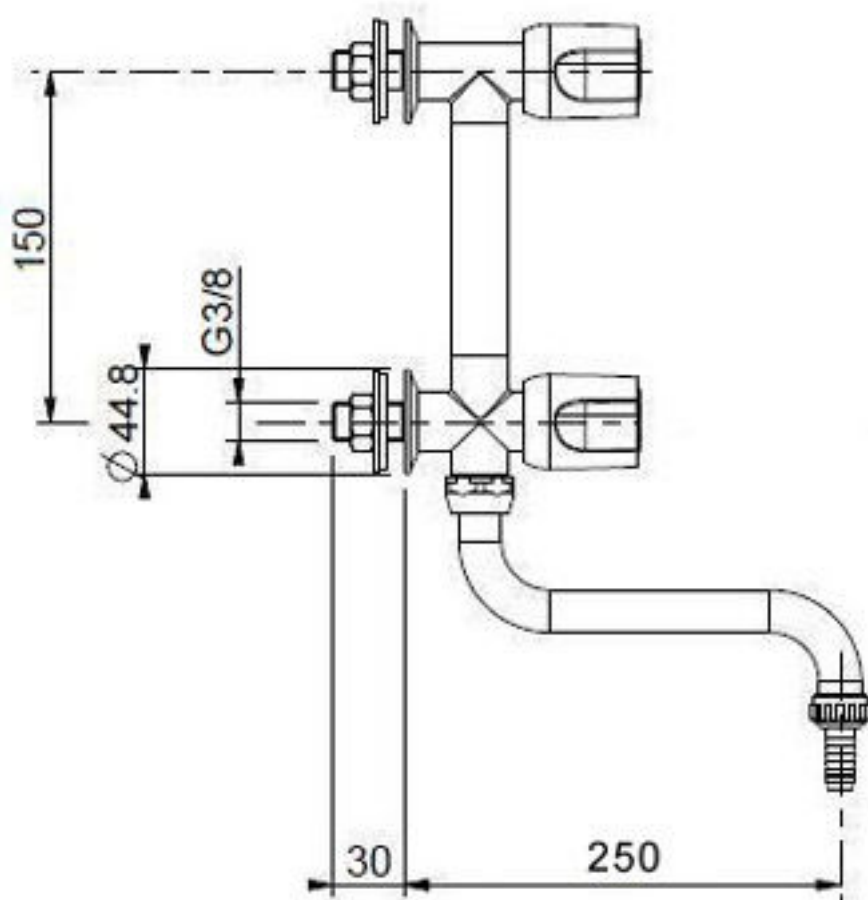



PRO LAB SYS

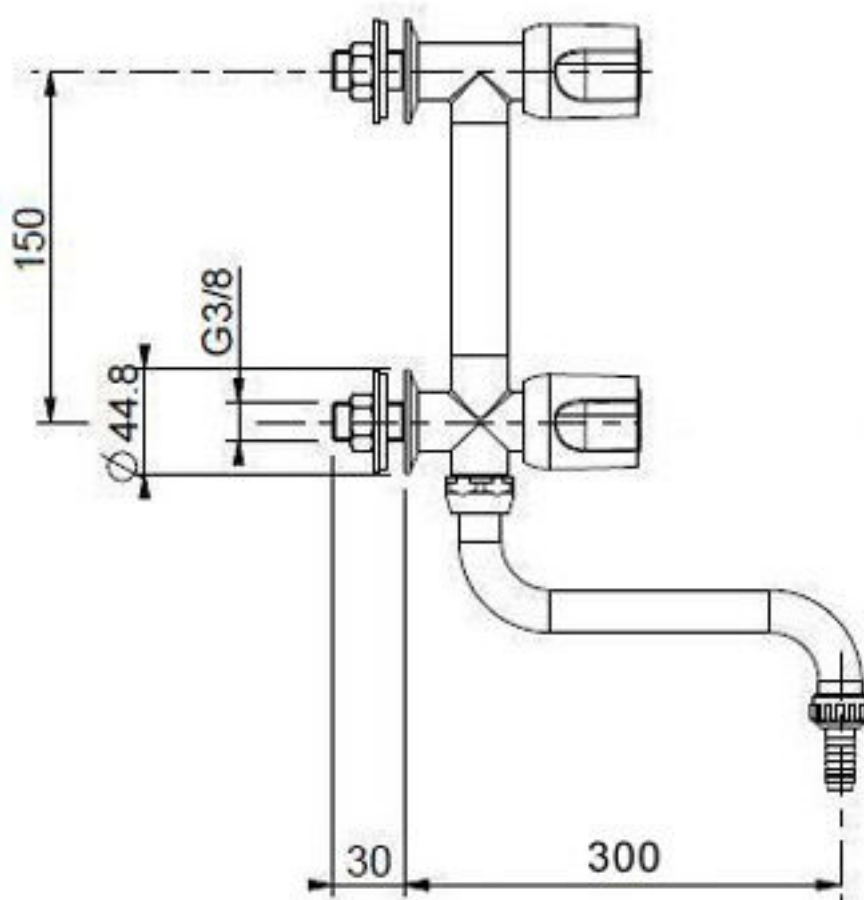



PRO LAB SYS

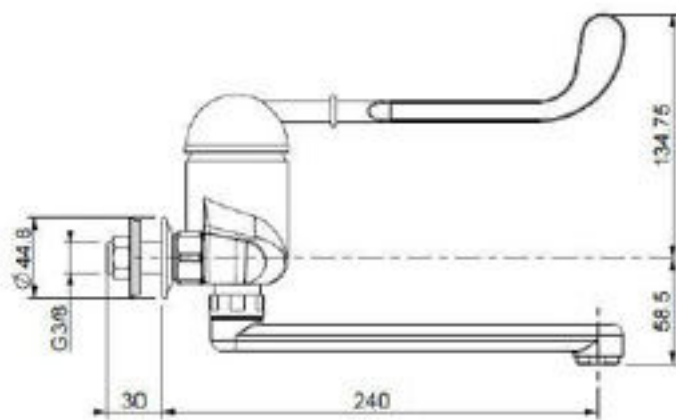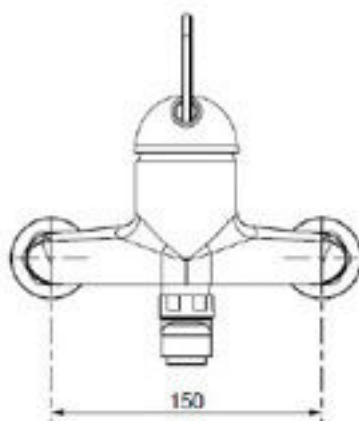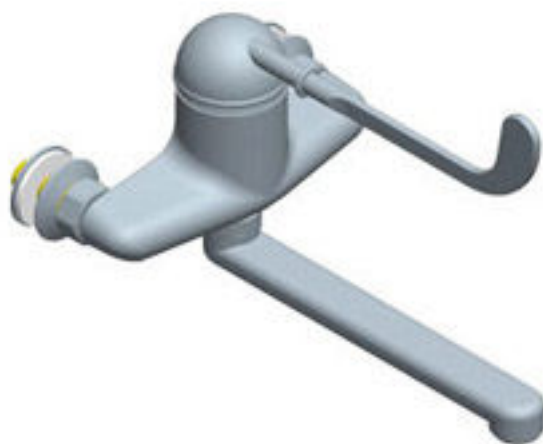



PRO LAB SYS

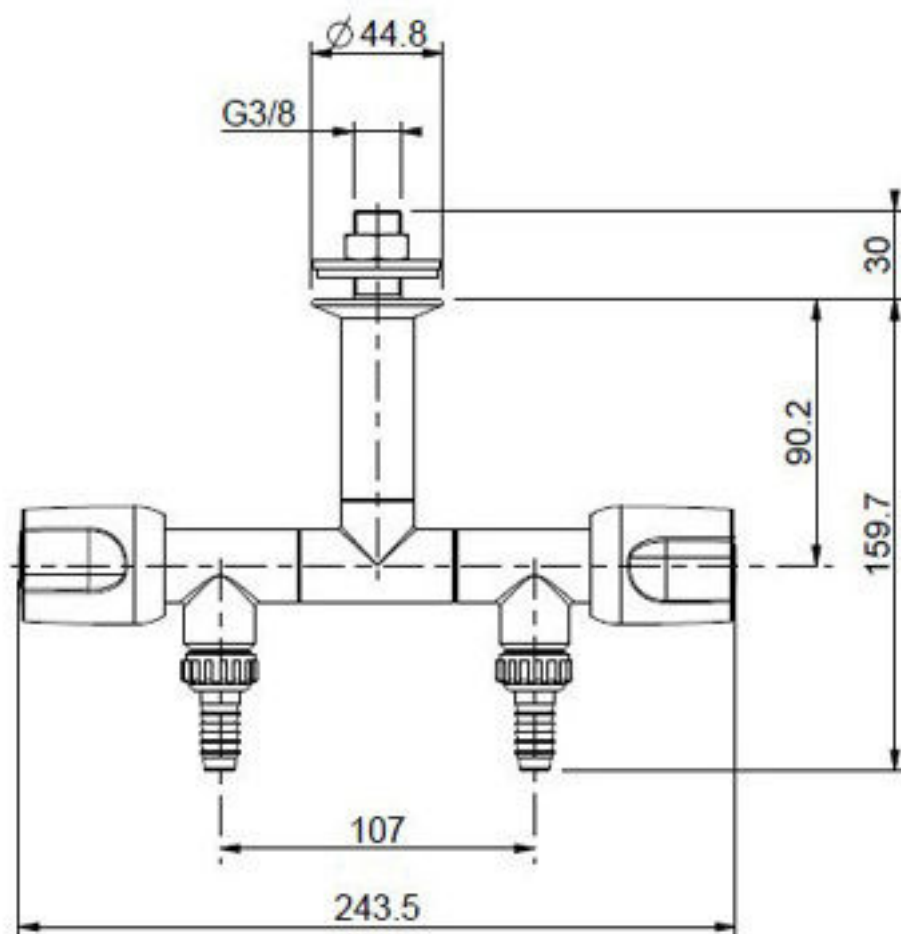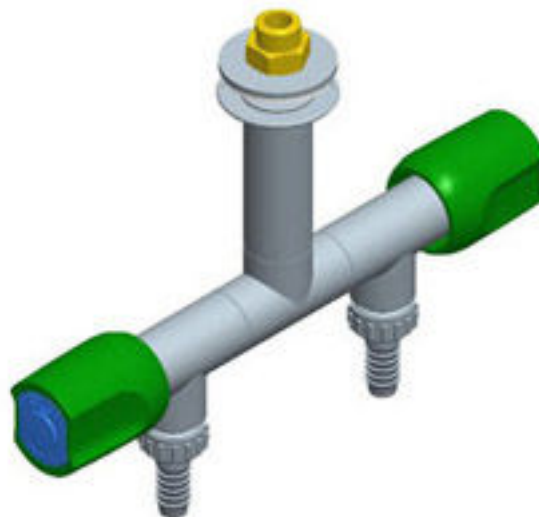


PRO LAB SYS

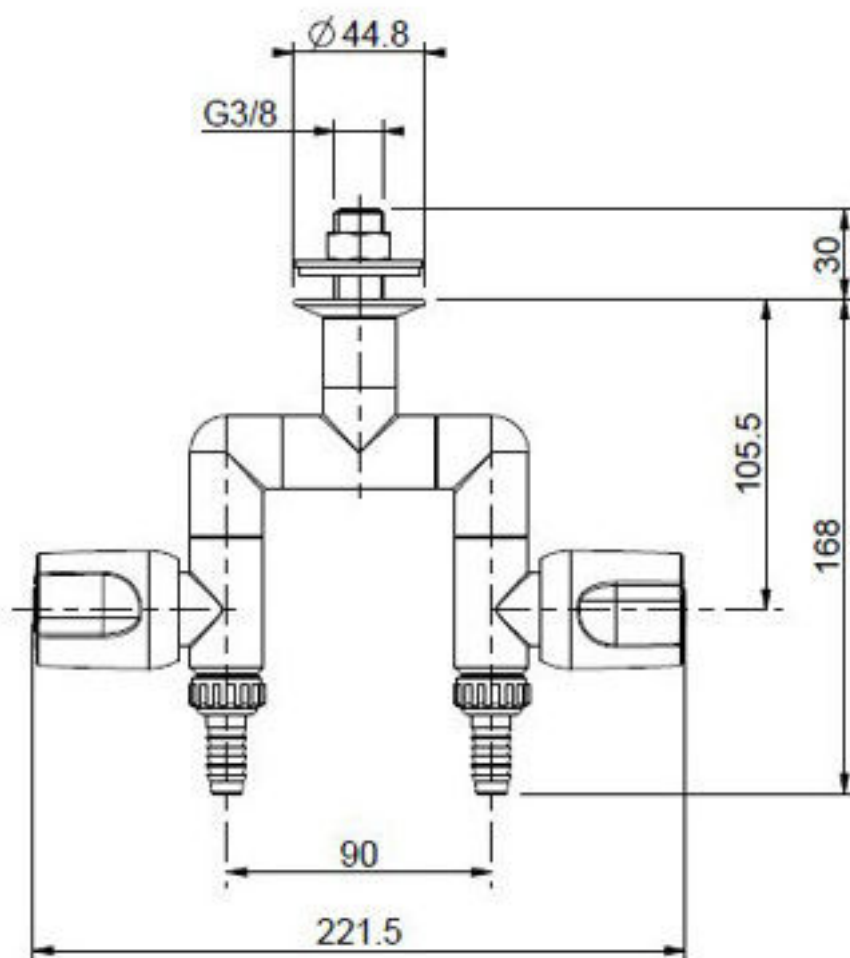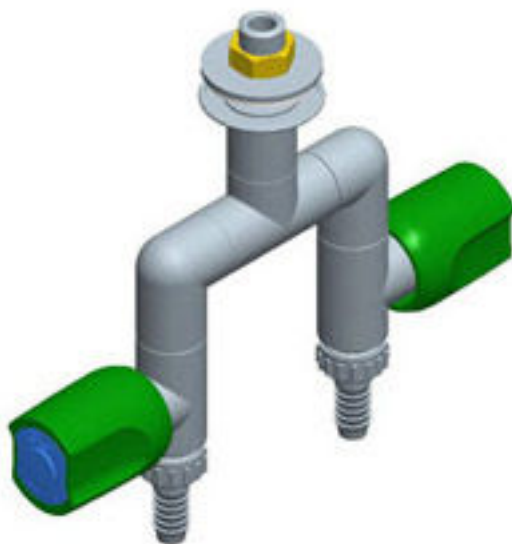



PRO LAB SYS

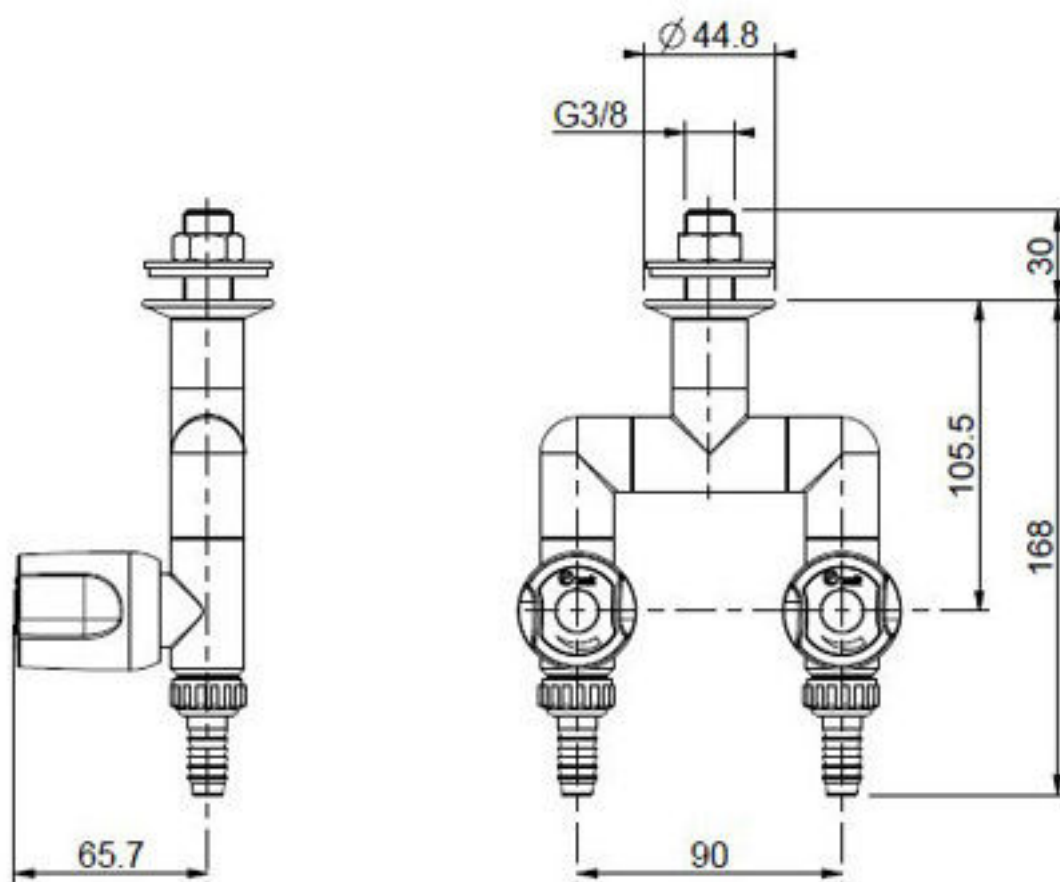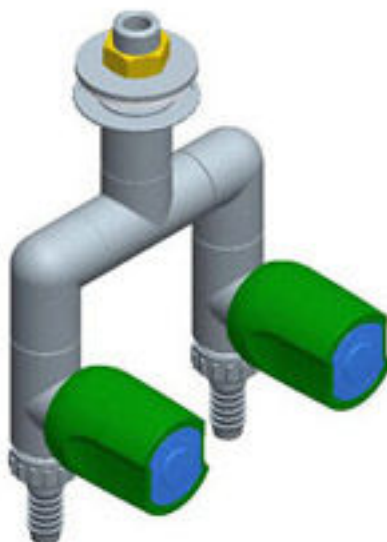


PRO LAB SYS

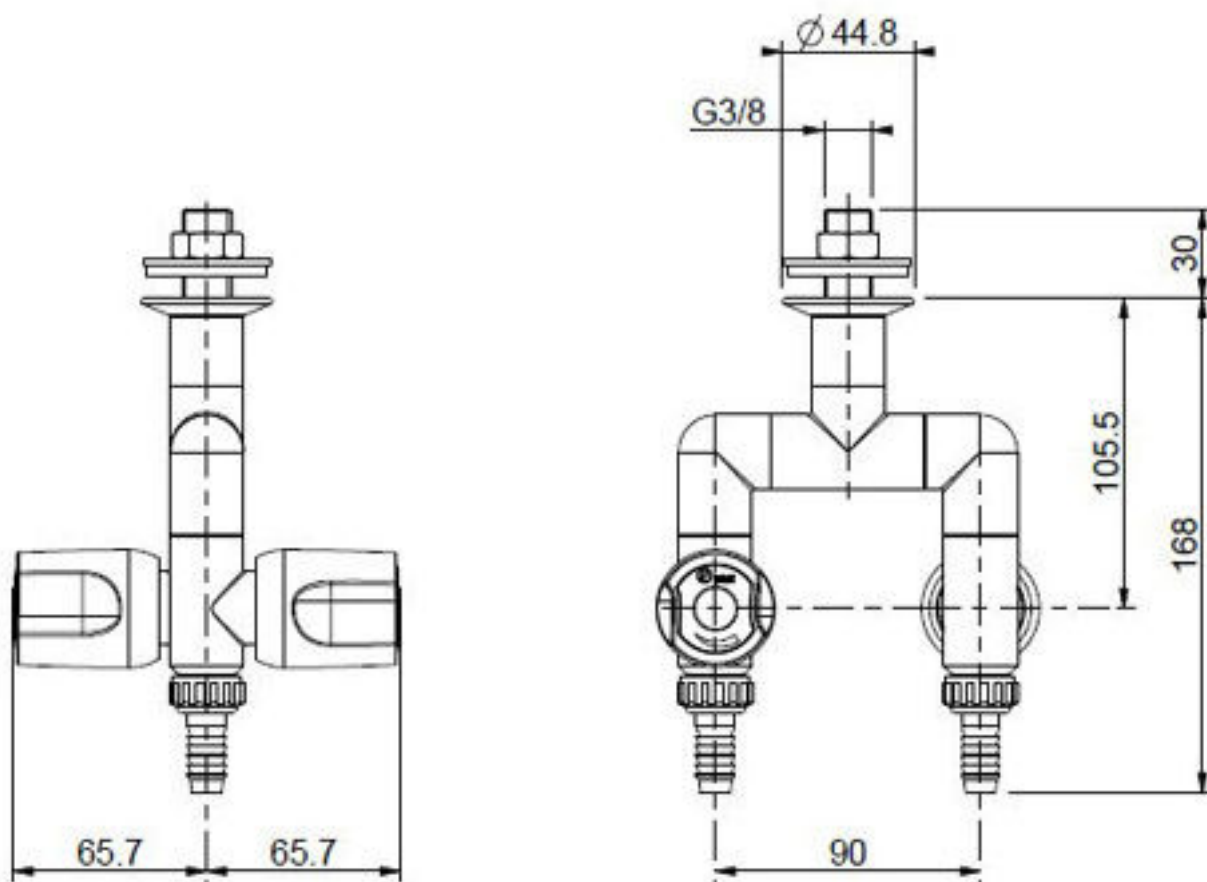


PRO LAB SYS

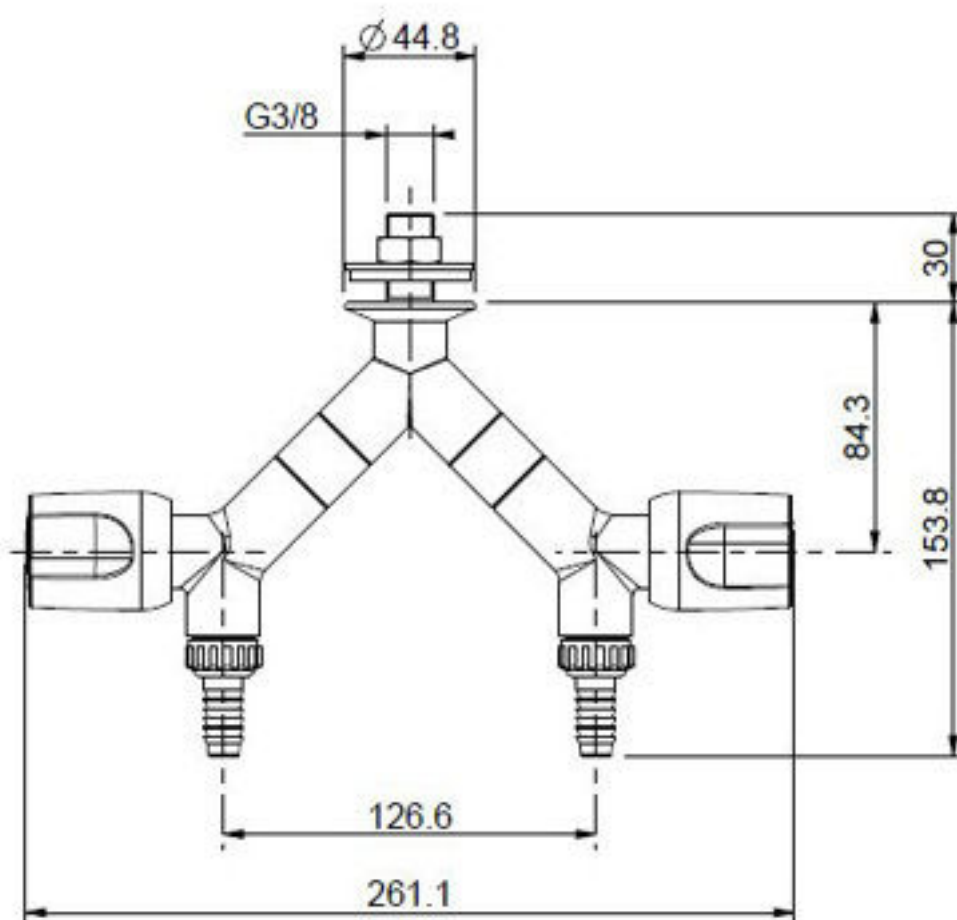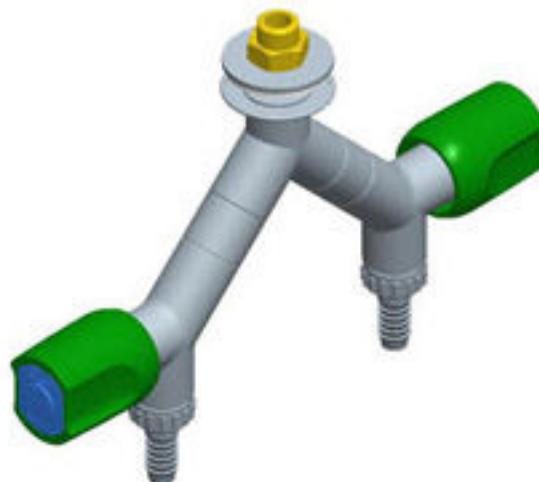


PRO LAB SYS

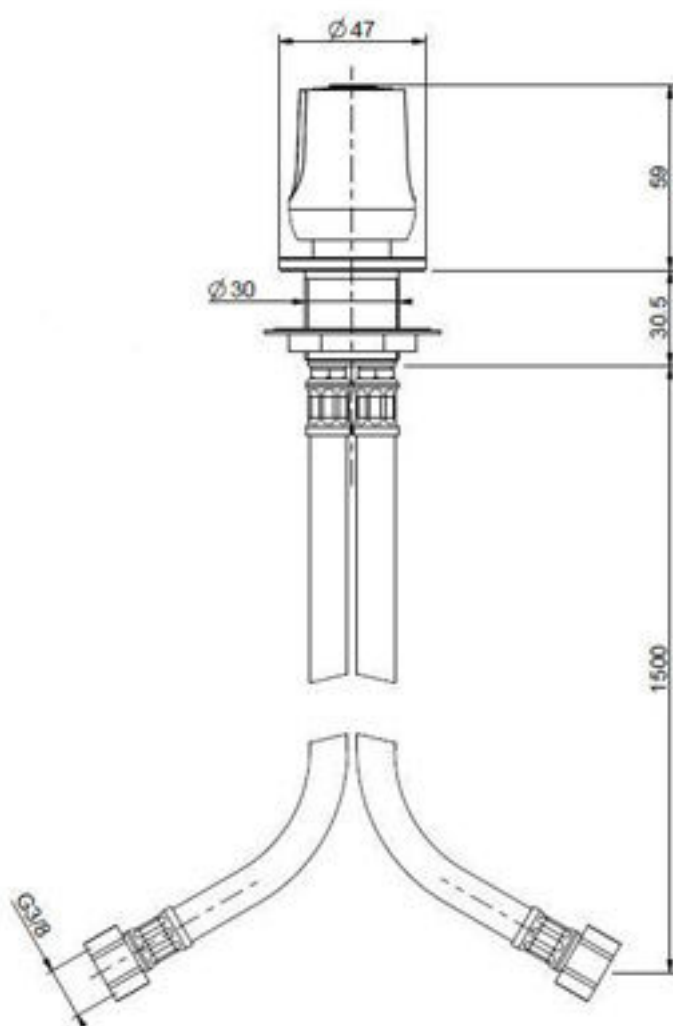


PRO LAB SYS

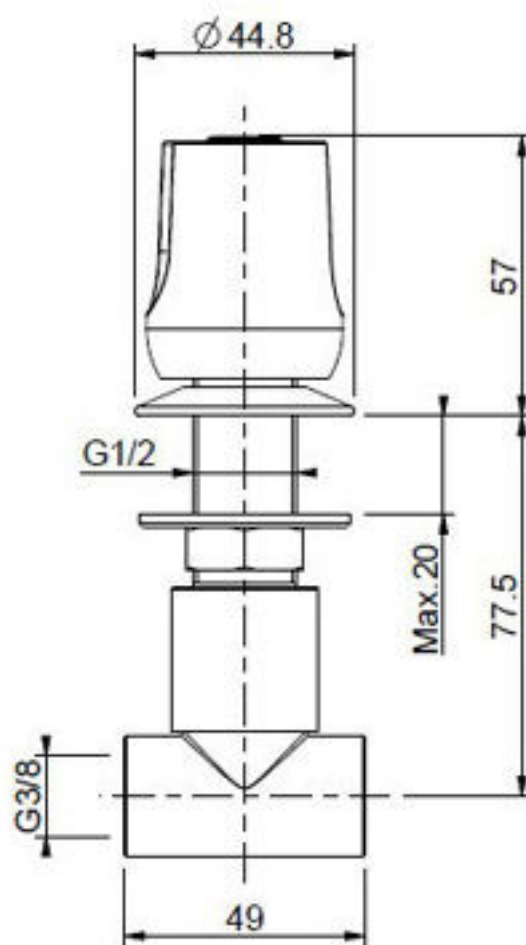


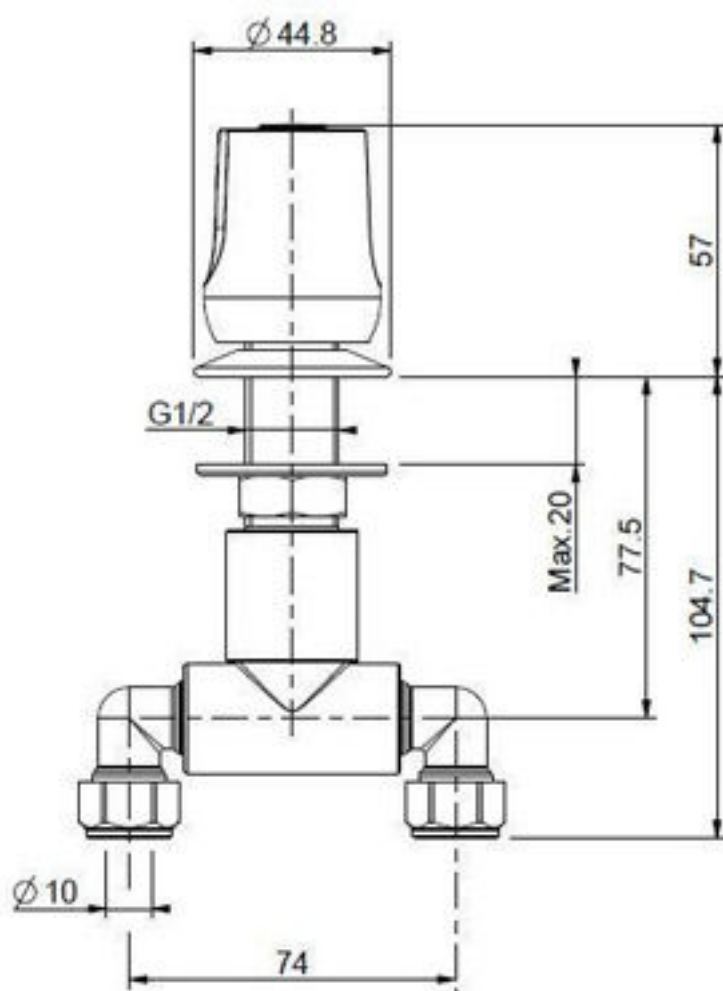


PRO LAB SYS


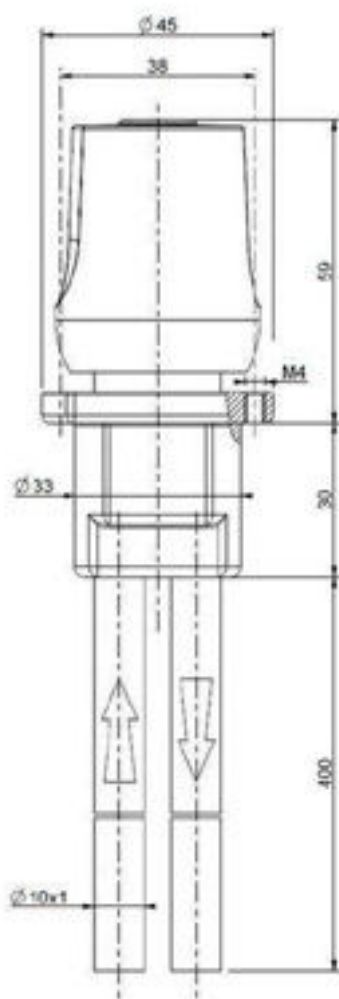


PRO LAB SYS

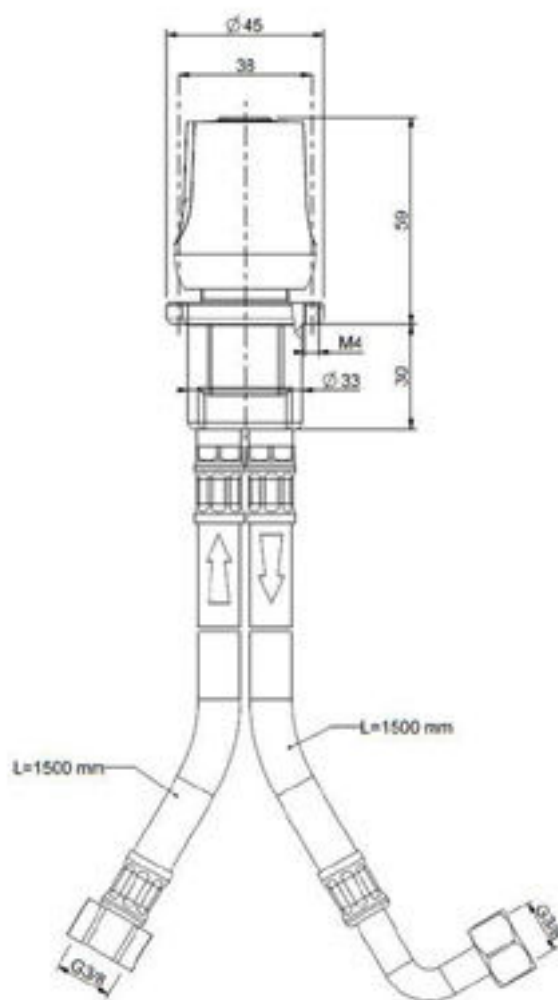


PRO LAB SYS

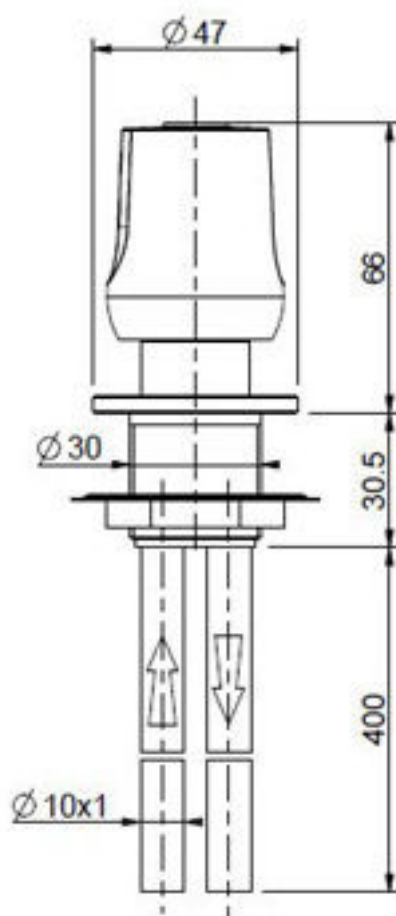


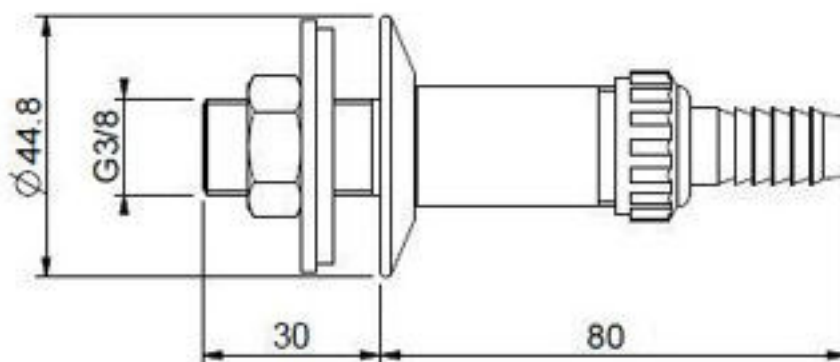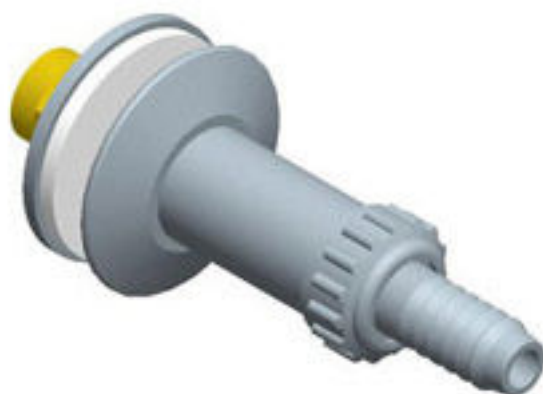


PRO LAB SYS

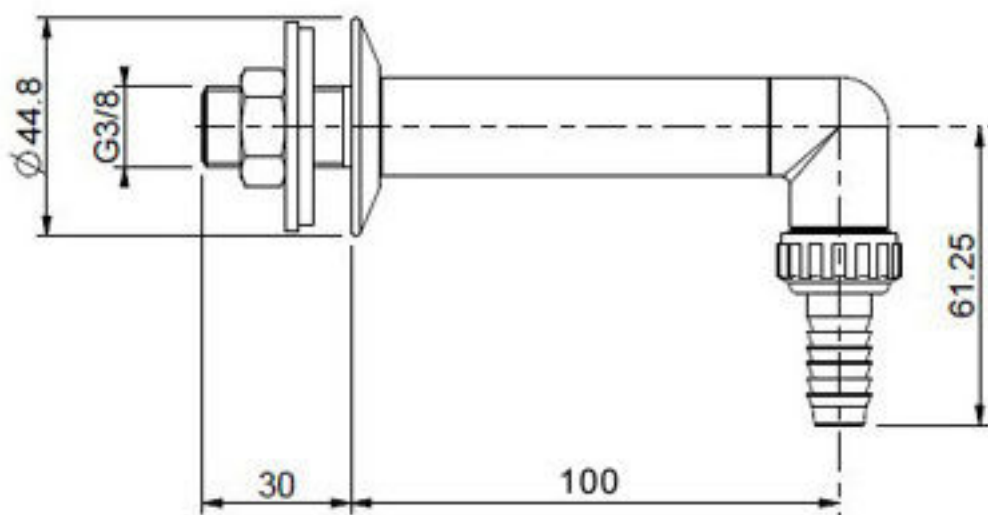


PRO LAB SYS

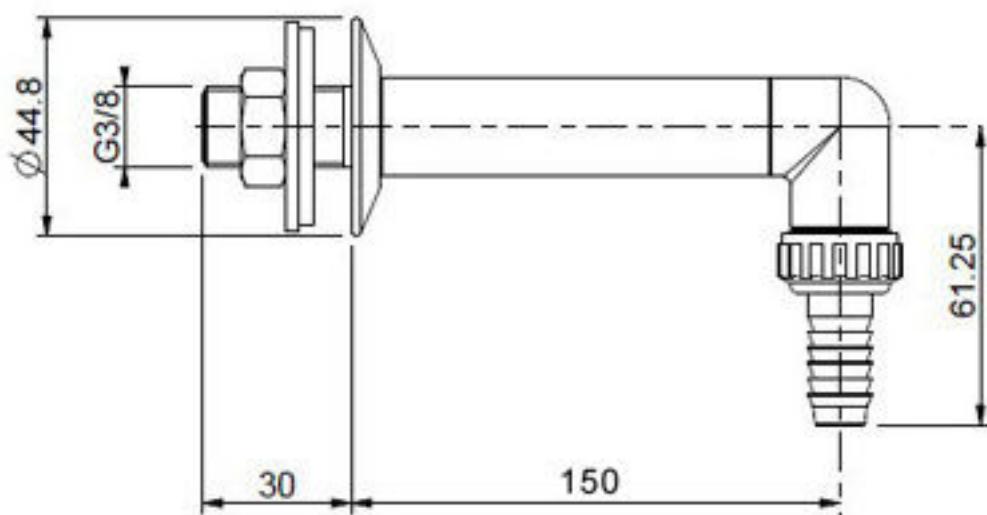


PRO LAB SYS

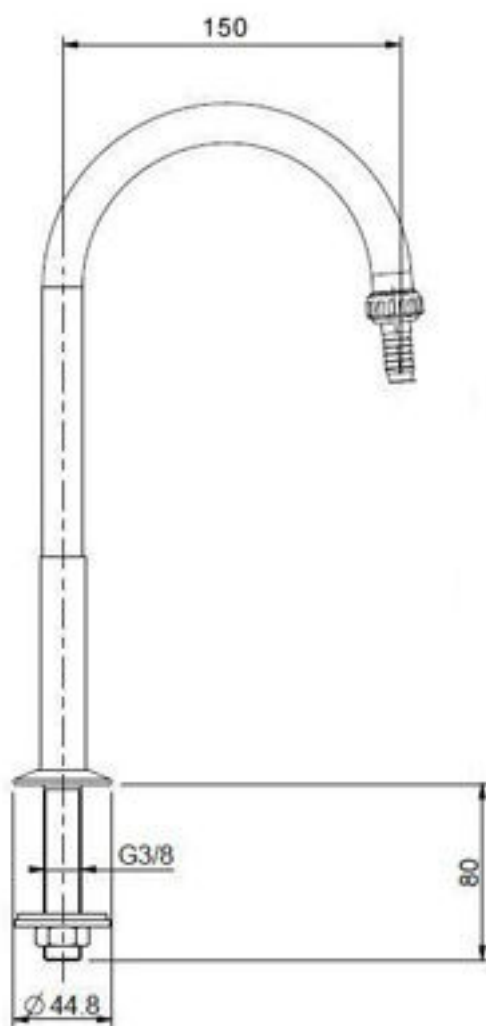


PRO LAB SYS

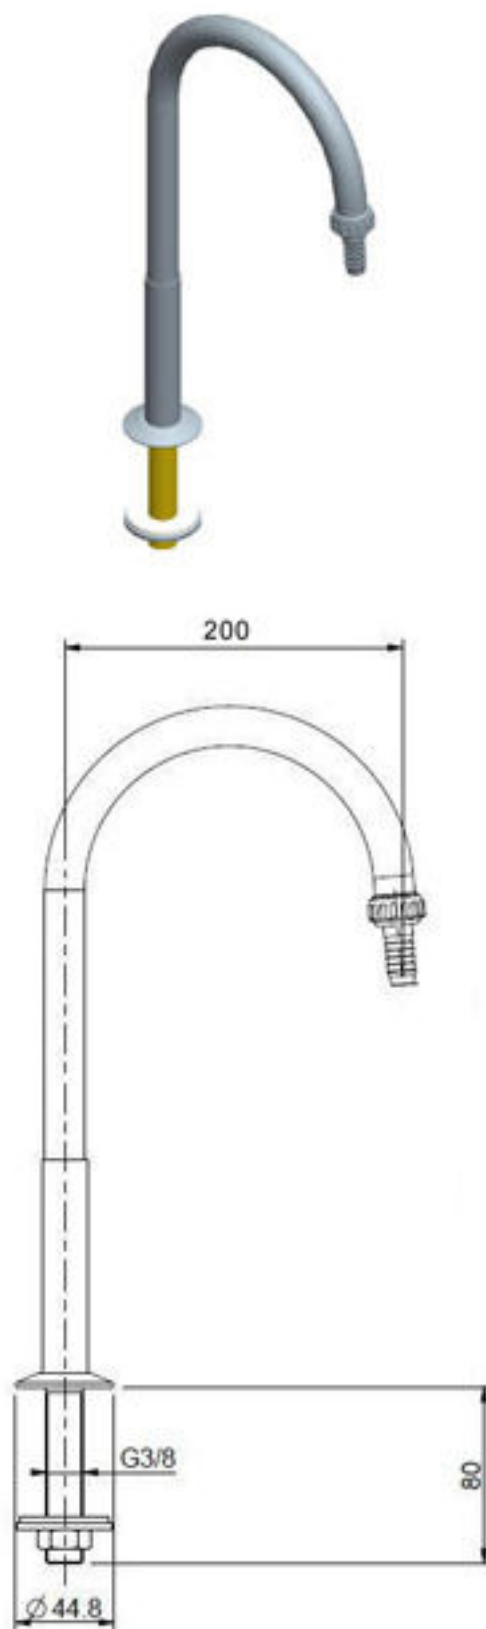


PRO LAB SYS

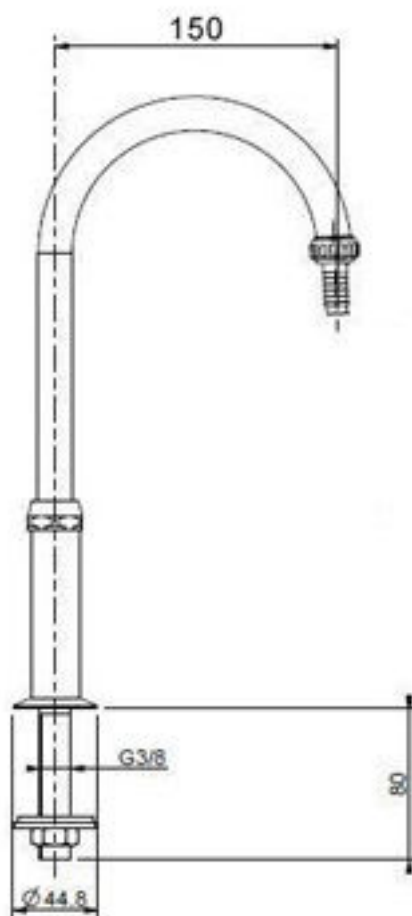


PRO LAB SYS

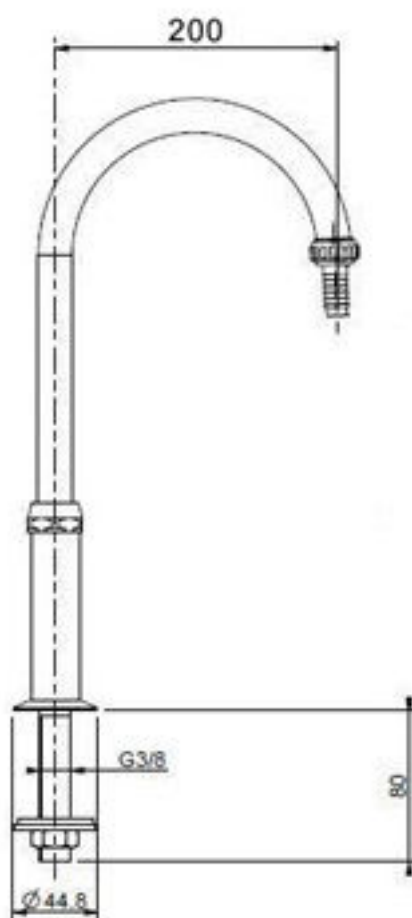

PRO LAB SYS

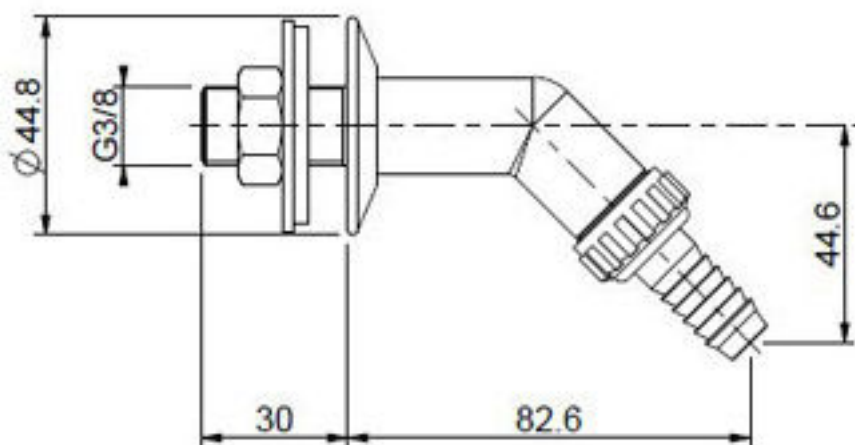

PRO LAB SYS

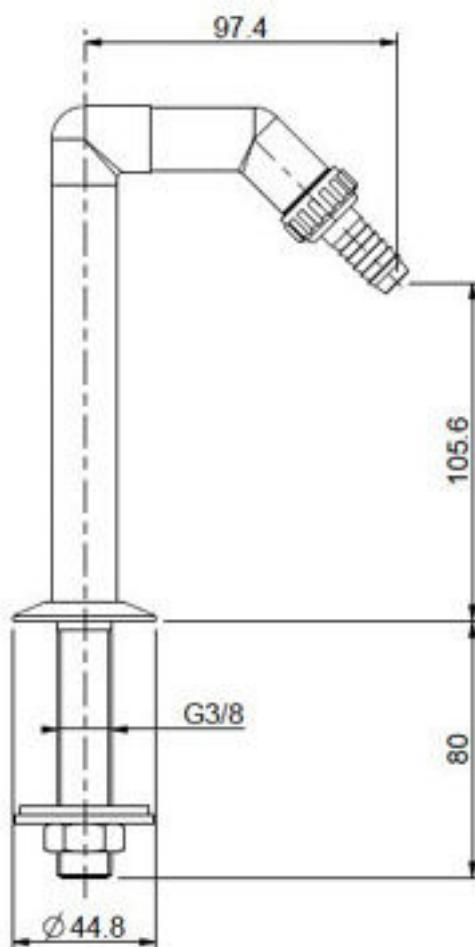

AO-1056

koncovka stojánková 45° voda